


CP- UNP-3020R50DA-P

2MP 30x WDR Network Laser PTZ Dome Camera

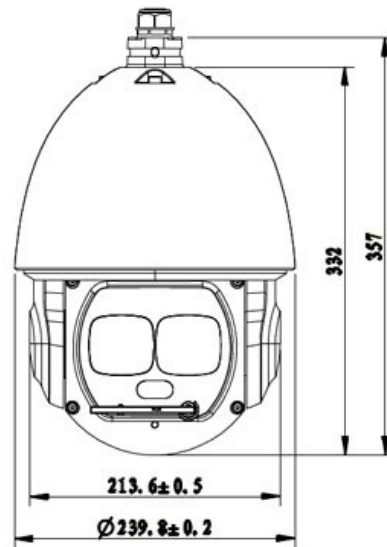

Main Features

- 1/1.9" 2MP CMOS Image sensor
- Max 60fps@720P and 30fps@1080P resolution
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), Day/Night (ICR), 3D DNR, BLC, HLC, AWB
- Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
- Max 240°/s pan speed, 360° endless pan rotation
- Auto-tracking and IVS, IR Range of 500 Mtr.
- Built-in 7/2 alarm in/out, IP67, Hi-PoE, Micro SD
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNP-3020R50DA-P

2MP 30x WDR Network Laser PTZ Dome Camera



Feature

Feature	Specification
Image Sensor	1/1.9" 2 MP CMOS
Effective Pixels	1920(H) x 1080(V), 2 Megapixels
S/N Ratio	More than 56dB
Minimum Illumination	Color: 0.002Lux@F1.5; 0Lux@F1.5 (IR on)
Focal Length	6mm~180mm
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Focus Control	Auto / Manual
Close Focus Distance	100mm~ 1000mm
Angle of View	H: 61.2° ~ 2.1°
Electronic Shutter	1/1 ~ 1/30,000s
AGC control	Auto / Manual
Back Light Compensation	BLC / HLC / WDR(120dB)
Optical Zoom	30x
Digital Zoom	16x
Pan Travel	0° ~ 360° endless, Pan Speed: 0.1° ~ 200°/sec
Tilt Travel	-10° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 120°/sec
Presets	300
Preset Speed	Pan: 240° /s; Tilt: 200° /s
Special Features	Defog, EIS, ROI, IR Range of 500 Mtr., Up to 300 Presets, 8 Tour, 5 Pattern, 5 Auto scan
Privacy Masking	Up to 24 areas
Power up Action	Auto restore to previous PTZ and lens status after power failure
Time Task	Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
Idle Motion	Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Day/Night: IR Cut Filter	Auto (ICR) / Color / B/W
Video Compression	H.264 / MJPEG
Video Streaming	Main Stream: 1080P/ D1 (1 ~ 25/30fps), 720P(1~50/60fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 720P/D1/ CIF (1 ~ 25/30fps)
Audio Compression	G.711a/G.711mu/G.726/AAC
Audio Streaming	1/1 channel In/Out
Auto Tracking	Single-scene, multiple-scene, panorama-scene
Networking	RJ-45 (10/100Base-T), 1RS485



*Product casing and specifications are subject to change without prior notice

CP- UNP-3020R50DA-P

2MP 30x WDR Network Laser PTZ Dome Camera



Feature

IVS

Protocols

Alarm

Max Remote Users

Memory Slot

Smart Phone

Operating Temperature

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

Tripwire, Intrusion, Abandoned/Missing, Face Detection

IPv4/IPv6,HTTP,HTTPS,SSL,TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP,RTP, SMTP, NTP,DHCP,DNS,PPPOE,DDNS,FTP, IP Filter,QoS,Bonjour,802.1x, ONVIF, PSIA, CGI

7/2 channel In/Out

20 users

Micro SD, Max 128GB

iPhone, iPad, Android Phone

-40°C ~ 70°C (-40°F ~ +158°F) / Less than 90% RH

IP67

Φ240(mm) x 357 (mm)

6.75 kg

AC24V/3A(±25%), Hi-POE

24W, 38W (IR on)